


0.6/1 kV XLPE/LSHF (2 CORES) LOW SMOKE & HALOGEN FREE CABLES

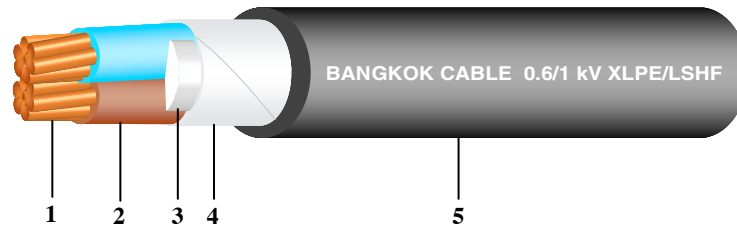

Standards Achieved :

Construction	: IEC 60228, IEC 60502-1
Flame propagation	: IEC 60332-1-2 : IEC 60332-3-24 Category C
Acid gas emission	: IEC 60754-1 : IEC 60754-2
Smoke emission	: IEC 61034-2

Construction :

1. Conductor	: Concentric stranded or Compacted stranded copper wires
2. Insulation	: Cross-linked polyethylene (XLPE) Blue, Brown colour or requested colour
3. Filler	: LSHF rod and/or FR-filler yarn
4. Binding tape	: Polyester tape
5. Sheath	: Low smoke & halogen free compound (LSHF), Black colour, or requested colour

Classification :

Maximum conductor temperature	: 90°C
Maximum circuit voltage	: 1,000 V
AC test voltage	: 3,500 V

Application :

Preferably used for installation into conduit and surface wiring which provide flame retardant, low smoke & corrosive gases properties in case of fire.

No. of core	Conductor			Thickness of insulation mm (Nominal)	Thickness of sheath mm (Nominal)	Overall diameter mm (Approx.)	Conductor resistance at 20°C Ω/km (Max.)	Current rating in free air at 40°C ambient A	Cable weight kg/km (Approx.)	Standard length m
	Cross-sectional area mm ²	No. of wires (Min.)	Diameter mm (Approx.)							
2	1.5	7	1.53	0.7	1.8	11.0	12.1	24	120	500
2	2.5	7	1.98	0.7	1.8	11.5	7.41	33	160	500
2	4	7	2.49	0.7	1.8	12.5	4.61	44	200	500
2	6	7	3.09	0.7	1.8	14.0	3.08	57	260	500
2	10	6	3.72	0.7	1.8	15.0	1.83	78	360	500
2	16	6	4.69	0.7	1.8	17.0	1.15	105	510	500
2	25	6	5.90	0.9	1.8	20.5	0.727	135	760	500
2	35	6	6.95	0.9	1.8	22.5	0.524	168	1,000	500
2	50	6	8.33	1.0	1.8	26.0	0.387	212	1,330	500
2	70	12	9.73	1.1	1.8	29.5	0.268	263	1,820	500
2	95	15	11.43	1.1	1.9	33.0	0.193	321	2,440	500
2	120	18	12.95	1.2	2.0	36.5	0.153	373	3,060	500
2	150	18	14.27	1.4	2.1	40.5	0.124	431	3,750	500
2	185	30	15.98	1.6	2.3	45.0	0.0991	493	4,700	400
2	240	34	18.47	1.7	2.5	51.0	0.0754	584	6,110	300
2	300	34	20.68	1.8	2.6	56.0	0.0601	674	7,550	250
2	400	53	23.39	2.0	2.9	63.5	0.0470	812	9,630	200